


SYSTEM

- Light a small single desk with two presenters.
- Light weight fixtures can be hung from suspended ceilings.
- Available in non-dimming and dimming configurations.

LAYOUT

This package of equipment is designed to cover a single small desk with 2 presenters sitting side by side or a small 2 person interview set.

The Type B backlights should be no more than 6' above the Talent's head. The center Type A fixture should be centered between the Talent from 8' away and 7'-8' off the ground. The two remaining Type A fixtures at the front should be crossed from each side at the same height and distance as the center front fixture. Adjustable hangers are available if required. If mounted in the proper configuration an aggregated light level of 90-120 foot candles above ambient light will fill the Talent zone. With all fixtures "full-on," power consumption is less than 900 watts.

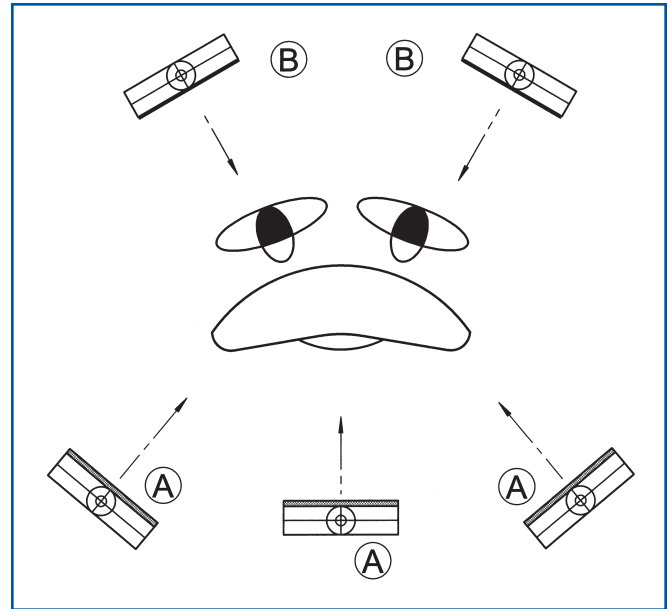

COMPONENTS

120 Volt Non-Dimming (NDPS-1)

Type	Qty	Model	Description
(A)	3	P110-255BX-120	Power Key, Focusable Non-Dim Fixture
(B)	3	ZS-P110-W	Wide Zone Control Screen
	2	P055-155BX-120	Power Key, Focusable Non-Dim
	2	ZS-P055-W	Wide Zone Control Screen
	8	L-BX55/30	55w Lamps, 3000K

Note: Adjustable hangers may be required

120 Volt Dimming (DDPS-1)

Type	Qty	Model	Description
(A)	3	P110-255BX-D/PM-120	Power Key, Focusable w/ Phase Control Dim
	3	ZS-P110-W	Wide Zone Control Screen
(B)	2	P055-155BX-D/PM-120	Power Key, Focusable w/ Phase Control Dim
	2	ZS-P055-W	Wide Zone Control Screen
	8	L-BX55/30	55w Lamps, 3000K
	*1	DC-V-10	12 Channel Vista 10 Control
	*1	DC-4X600	VID Strip 4 circuit X 600 watts
	*1	CB-C-DMX50	50' DMX Cable
	*1	CB-D-GG15	15' Power Cable (GTL Plug)

Note: Adjustable hangers may be required

230 Volt Non-Dimming (NDPS-2)

Type	Qty	Model	Description
(A)	3	P110-255BX-230	Power Key, Focusable Non-Dim Fixture
(B)	3	ZS-P110-W	Wide Zone Control Screen
	2	P055-155BX-230	Power Key, Focusable Non-Dim Fixture
	2	ZS-P055-W	Wide Zone Control Screen
	8	L-BX55/30	55w Lamps, 3000K

Note: Adjustable hangers may be required

230 Volt Dimming (DDPS-2)

Type	Qty	Model	Description
(A)	3	P110-255BX-DMX-230	Power Key, Focusable w/ DMX Dimming
	3	ZS-P110-W	Wide Zone Control Screen
(B)	2	P055-155BX-DMX-230	Power Key, Focusable w/ DMX Dimming
	2	ZS-P055-W	Wide Zone Control Screen
	8	L-BX55/30	55w Lamps, 3000K
	*1	DC-V-10	12 Channel Vista 10 Control
	*4	CB-C-DMX25	25' DMX Cable
	*1	CB-C-DMX50	50' DMX Cable

Note: Adjustable hangers may be required