


SYSTEM

- Creates medium sized “pool” of light.
- Lighting is attractive, comfortable.
- Ideal for newsroom or “work” environments.
- Light weight fixtures can be hung from suspended ceilings.
- Available in non-dimming and dimming configurations.

LAYOUT

This package is designed to surround a single Talent position with fixtures in a low ceiling environment.

Three fixtures are suspended from the ceiling by scissor clips in a triangular pattern with the Talent facing the apex of the triangle. If mounted in the proper configuration an aggregate light level of 60-80 foot candles above the ambient light will fill the Talent zone. With all fixtures “full on,” power consumption will be less than 400 watts.

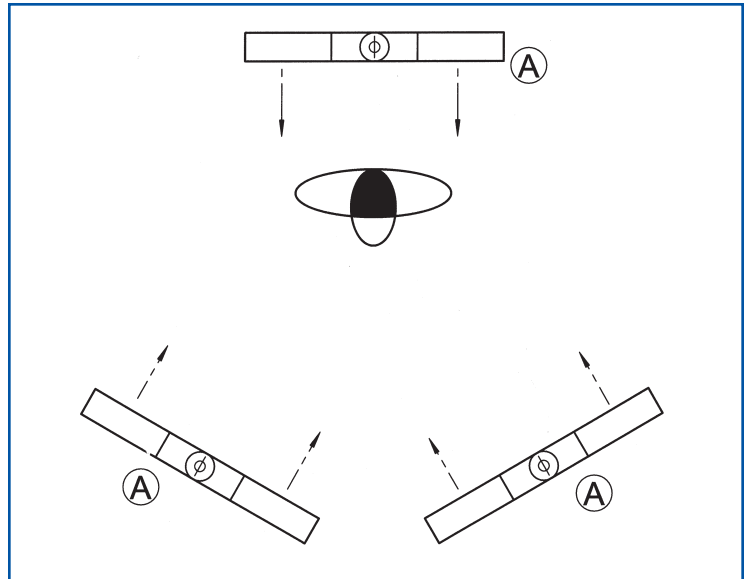

COMPONENTS

120 Volt Non-Dimming (NDFP6-1)

Type	Qty	Model	Description
Ⓐ	3	M110-255BX-120	Modular Non-Dim Fixture
	3	MT-MH-BS	Baby Spud 5/8"
	3	MT-MH-SC	Drop Ceiling Scissor Clamp
	6	L-BX55/30	55w Lamps, 3000K

120 Volt Dimming (DFP6-1)

Type	Qty	Model	Description
Ⓐ	3	M110-255BX-D/PM-120	Modular w/ Phase Control Dim
	3	MT-MH-BS	Baby Spud 5/8"
	3	MT-MH-SC	Drop Ceiling Scissor Clamp
	6	L-BX55/30	55w Lamps, 3000K

Note: Fixtures for #DFP6-1 must be connected to compatible dimming control equipment.

230 Volt Non-Dimming (NDFP6-2)

Type	Qty	Model	Description
Ⓐ	3	M110-255BX-230	Modular Non-Dim Fixture
	3	MT-MH-BS	Baby Spud 5/8"
	3	MT-MH-SC	Drop Ceiling Scissor Clamp
	6	L-BX55/30	55w Lamps, 3000K

230 Volt Dimming (DFP6-2)

Type	Qty	Model	Description
Ⓐ	3	M110-255BX-DMX-230	Modular w/ DMX Dimming
	3	MT-MH-BS	Baby Spud 5/8"
	3	MT-MH-SC	Drop Ceiling Scissor Clamp
	6	L-BX55/30	55w Lamps, 3000K
	*1	DC-V-10	12 Channel Vista 10 Control
	*2	CB-C-DMX25	25' DMX Cable
	*1	CB-C-DMX50	50' DMX Cable