


SYSTEM

- Small desk/Single camera/Single Talent lighting solution.
- Light weight fixtures can be hung from suspended ceilings.

LAYOUT

This package of equipment is designed to light a single small desk with 1 presenter for a single camera in grid or low ceiling.

The backlight should be no more than 6' above the talent's head. The front fixtures are designed to be used 6'-8' from the talent and 7'-8' off the ground. If mounted properly an aggregated light level of 60-80 foot candles above the ambient light will fill the talent zone. With all fixtures "full-on," power consumption is less than 160 watts. Adjustable hangers are available if required.

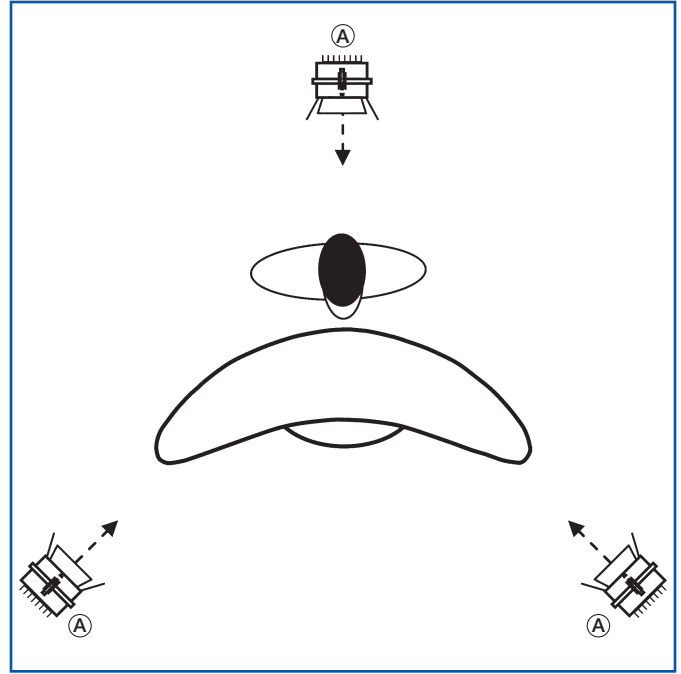

COMPONENTS

120 TO 230 Volt Dimming (DSPS-L-OB) for Drop Ceiling

Type	Qty	Model	Description
Ⓐ	3	LV-050-32K-OB	Little Vid LED w/OB Dim Fixture w/ permanent Barn Doors
	6	LB-MAG-GEL-LV050	Magnet Gel Holders
	2	MT-MH-SC	Drop Ceiling Scissor Clamp

120 TO 230 Volt Dimming (DSPS-L-DMX) for Grid

Type	Qty	Model	Description
Ⓐ	3	LV-050-32K-DMX	Little Vid LED w/DMX Dim Fixture w/ permanent Barn Doors
	6	LB-MAG-GEL-LV050	Magnet Gel Holders
*	1	DC-ETC-1296	12 Channel ETC SmartFade® Console **
*	2	CB-C-DMX25	25' DMX Cable
*	1	CB-C-DMX50	50' DMX Cable